

**(19) World Intellectual Property Organization  
International Bureau**



**(43) International Publication Date**  
**10 July 2003 (10.07.2003)**

**PCT**

**(10) International Publication Number**  
**WO 03/056235 A1**

(51) International Patent Classification<sup>7</sup>: F21V 7/04

**(21) International Application Number:** PCT/IB02/05297

(22) International Filing Date: 12 December 2002 (12.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 102 00 010.7 2 January 2002 (02.01.2002) DE

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-  
damm 94, 20099 Hamburg (DE).

Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). **LUCE, Thomas** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). **FRANSEN, Petrus J., M.** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(74) Agent: VOLMER, Georg; Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

**(81) Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except DE, US):  
**KONINKLIJKE PHILIPS ELECTRONICS N.V.**  
[N1/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven  
(NL).

(72) Inventors; and

(75) **Inventors/Applicants (for US only): VAN GENNIP,**  
Nicaius [DE/DE]; c/o Philips Intellectual Property &  
Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).  
**HAACKE, Michael** [DE/DE]; c/o Philips Intellectual


**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

*[Continued on next page]*

(54) Title: DISCHARGE LAMP WITH A REFLECTOR AND AN ASYMMETRICAL BURNER

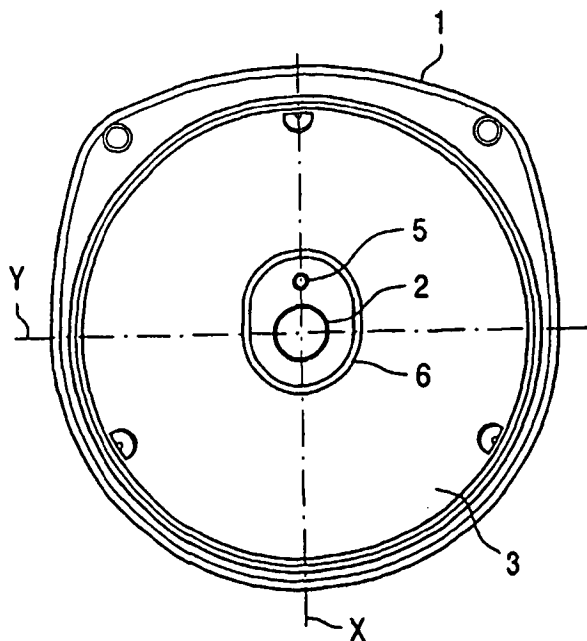

**(57) Abstract:** The invention relates to a discharge lamp with a reflector (1) and an asymmetrical burner, which reflector (1) comprises at least a reflecting surface (3) and a hollow reflector neck (4), while the asymmetrical burner is partly arranged in said hollow reflector neck (4) without making contact therewith, wherein the shape and the size of the inner contour (6) of the reflecting surface (3) of the reflector (1) corresponds substantially to the contour of the asymmetrical burner, and the asymmetrical burner is centrally located in the reflector (1).

**WO 03/056235 A1**

BEST AVAILABLE COPY



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# Discharge lamp with a reflector and an asymmetrical burner

The invention relates to a discharge lamp with a reflector and an asymmetrical burner, which reflector comprises at least a reflecting surface and a hollow reflector neck, while the burner is partly arranged in said hollow reflector neck without making contact therewith.

5           The light quality is dependent on various parameters, for example the efficiency of the reflector, in the case of a discharge lamp comprising at least a burner and a reflector. The efficiency of the reflector is influenced not only by the nature and quality of its reflecting surface, but also by the reflector geometry. The reflector geometry attuned to the respective application, i.e. in particular its shape and size, is inextricably interlinked with the  
10   nature of the light source and the geometry thereof.

A light source in the sense of the invention may be, for example, a known burner of a discharge lamp with a return pole. Such a burner with a return pole, which may be  
15   used, for example, in headlights of motor vehicles, has an asymmetrical shape on account of its construction. If such conventional discharge lamps are used, for example, for applications in which light is emitted with as low a loss as possible and is focused on a point or on a defined region, the efficiency of the reflector is dependent inter alia on the size of the reflecting surface area. The inner contours of the reflecting surfaces of the relevant known  
20   reflectors, which have a hollow reflector neck, all have a circular shape. The use of such a shape of the inner contour and of an asymmetrical burner renders it impossible to avoid an impairment of the light quality, here in particular of the light output. If the efficiency of the reflector has a particular significance, for example in applications where the light reflected by the reflector is coupled into an optical waveguide, a significant impairment of the light  
25   quality can be observed, caused by regularly occurring coupling losses. Losses again occur in the emission of the light from the optical waveguide each time, independently of the former losses, so that the efficiency of the reflector in such an optical waveguide system is one of the substantial determining factors for the total efficiency of the system. The use of such an optical waveguide system as a lighting system for motor vehicles, where standardized values

must be achieved on a regular basis with respect to the light quality, necessitates a very exact and expensive attunement of the optical system components. Optical waveguide systems for motor vehicles which have at least one light source, comprising at least one discharge lamp with a reflector and an asymmetrical burner, are in the focus of development. These optical  
5 waveguide systems comprise inter alia a system of optical waveguide cables and optical elements which realize and support the coupling of the light into and from the optical waveguide, thus making the light available for the desired application, for example through a headlight of a motor vehicle, in a known manner.

10

It is an object of the invention to provide a discharge lamp which can be manufactured in a technologically simple and inexpensive manner, while a required light quality is safeguarded by a good efficiency of the reflector.

The object is achieved in that the shape and the size of the inner contour of the  
15 reflecting surface of the reflector corresponds substantially to the contour of the burner, and in that the burner is centrally located in the reflector.

The invention renders it possible to realize an optimized adaptation of the shape and size of the inner contour of the reflecting surface of the reflector to the contour of the burner, in particular taking into account the tolerances necessary for mounting and  
20 adjustment of the asymmetrical burner and the reflector, the inner contour of the reflecting surface of the reflector, which merges directly into the reflector neck, being greater than the outer contour of the burner. This adaptation according to the invention offers the largest possible reflecting surface area of the reflector, an adaptation whose significance for the total efficiency of the reflector lamp, in particular in special applications, was ascertained by a  
25 plurality of laboratory experiments and which those skilled in the art have never before conceived or realized. Surprisingly simple means according to the invention thus provide a reflector lamp which can be used as an effective light source for optical waveguide systems. The central arrangement of the burner in the reflector in particular safeguards a simple and accurate adjustment of the focus.

30 Discharge lamps in the sense of the invention are all known lamp types with an asymmetrically shaped burner and a reflector. The asymmetrically shaped burners are in particular burners of discharge lamps known per se with return poles.

The reflector according to the invention then comprises usual materials such as glass, ceramic material, metal, and/or synthetic resin.

The expression "contour of the burner" is to be understood as being the outermost contour of the burner within the scope of the invention, i.e. the contour visible in the plan view (x-y plane) of the discharge lamp comprising an asymmetrical burner in the incorporated state, for example as shown in Fig. 1.

5 In a preferred embodiment of the solution according to the invention, the inner contour of the reflecting surface of the reflector is symmetrical with respect to the x-axis and asymmetrical with respect to the y-axis, while the asymmetrical portion of the burner extends in the direction of the x-axis after being assembled. Such a shaping of the inner contour of the reflecting surface of the reflector as proposed here renders it possible to use simple geometric  
10 shapes, such as semi-circular arcs and straight lines, while fulfilling the criteria mentioned above, resulting in a satisfactory adaptation of the respective inner contour to the outer contour of the burner in many applications, while observing the necessary tolerances.

A further preferred embodiment of the invention in this respect is characterized in that the inner contour of the reflecting surface of the reflector has the shape  
15 of an ellipse or of a rectangle with rounded corners.

An alternative embodiment of the invention is characterized in that the inner contour of the reflecting surface of the reflector is adapted to the contour of the burner such that the surface area of the reflecting surface reaches a maximum. Such a maximum is reached when very high requirements are imposed on the mutual agreement of the contours,  
20 while observing the necessary tolerances. This embodiment is technologically more complicated and accordingly requires a correspondingly higher expenditure in industrial mass manufacture.

The object of the invention is furthermore achieved in that a discharge lamp as claimed in the claims 1 to 4 is used as a light source in an optical waveguide system which  
25 serves as a lighting system for a motor vehicle and which has at least one light source comprising a discharge lamp with a reflector and an asymmetrical burner.

Optical waveguide systems within the scope of the invention comprise besides a light source at least a system of optical waveguide cables and optical elements which couple the light into and from the optical waveguide and which realize and support the  
30 provision of the light to the envisaged application, for example for lighting purposes, in a known manner.

The invention will be explained in more detail below with reference to an embodiment. In the Figure:

Fig. 1 diagrammatically shows a burner with a return pole of a discharge lamp,  
Fig. 2 shows a discharge lamp with a return pole in plan view, and  
Fig. 3 shows the reflector of the discharge lamp in lateral sectional view.

Fig. 1 diagrammatically shows a burner 2 with return pole 5 of a discharge lamp, which burner 2 is connected to the return pole 5 with electrical conduction in a known manner.

Fig. 2 is a plan view of a discharge lamp with a return pole 5 (for example a xenon lamp) for an optical waveguide system for the headlight of a motor vehicle. The reflector 1 is made of a borosilicate glass here and has a reflecting surface 3 and a hollow reflector neck 4. The burner 2 is centrally located in the reflector 1 by means of a retention device (not shown in Fig. 1) at least partly in the hollow reflector neck 4, without contact between the inner surface of the reflector neck 4 and the outer surface of the burner 2. A retention device fixes the burner 2 in a defined position which safeguards an optimum luminous intensity and focusing of the reflected light on the focus lying outside the reflector 1. In this focus, the reflected light is fed into an optical waveguide cable which is known per se, for example a glass fiber cable, of an optical waveguide system in a usual manner. The inner contour 6 of the reflecting surface 3 of the reflector 1 is symmetrical with respect to the x-axis in the x-y plane, and asymmetrical with respect to the y-axis. The inner contour 6 of the reflecting surface 3 of the reflector 1 is formed by simple geometric shapes, i.e. by two semi-circular arcs of equal size which are interconnected by two parallel straight lines. Given a radius of the semi-circular arcs of approximately five millimeters each, the distance of the inner contour 6 from the point of intersection of the x- and y-axes on the x-axis is approximately five millimeters and seven millimeters, respectively.

Fig. 3 shows the reflector of Fig. 2 in a cross-sectional lateral view.

## CLAIMS:

1. A discharge lamp with a reflector (1) and an asymmetrical burner, which reflector (1) comprises at least a reflecting surface (3) and a hollow reflector neck (4), while the asymmetrical burner is partly arranged in said hollow reflector neck (4) without making contact therewith, characterized in that the shape and the size of the inner contour (6) of the reflecting surface (3) of the reflector (1) corresponds substantially to the contour of the asymmetrical burner, and in that the asymmetrical burner is centrally located in the reflector (1).
2. A discharge lamp as claimed in claim 1, characterized in that the inner contour (6) of the reflecting surface (3) is symmetrical with respect to the x-axis and asymmetrical with respect to the y-axis.
3. A discharge lamp as claimed in claim 2, characterized in that the inner contour (6) of the reflecting surface (3) has the shape of an ellipse or of a rectangle with rounded corners, or is formed by semicircular arcs and straight lines.
4. A discharge lamp as claimed in claim 1, characterized in that the inner contour (6) of the reflecting surface (3) is adapted to the contour of the asymmetrical burner such that the surface area of the reflecting surface (3) reaches a maximum.
5. An optical waveguide system serving as a lighting system for motor vehicles, comprising at least one light source which is a discharge lamp having a reflector and an asymmetrical burner, characterized in that a discharge lamp as claimed in the claims 1 to 4 is used.
6. An optical waveguide system as claimed in claim 5, characterized in that the asymmetrical burner is a burner (2) with a return pole (5).

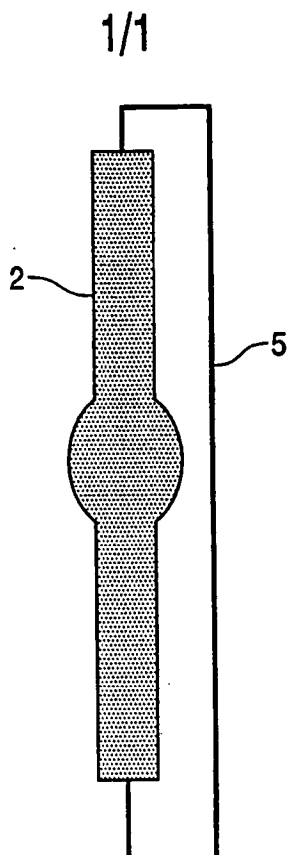


FIG. 1

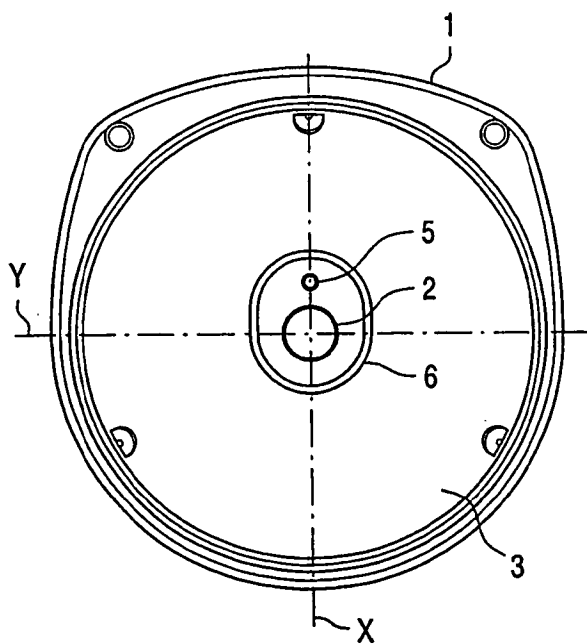


FIG. 2

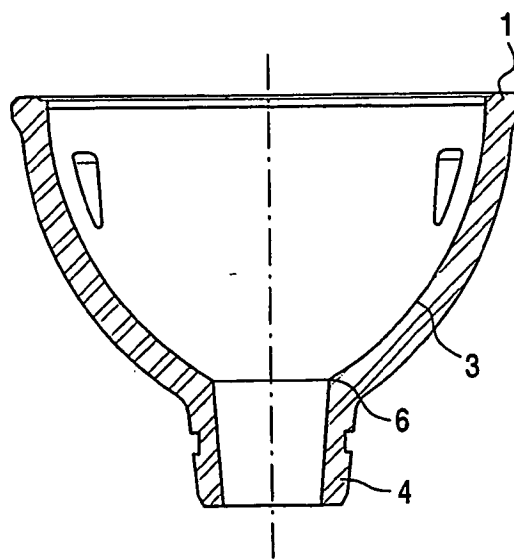


FIG. 3

*a*



**A. CLASSIFICATION OF SUBJECT MATTER**  
**IPC 7 F21V7/04**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

**IPC 7 F21V G02B**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

**EP0-Internal, WPI Data, PAJ****C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 39675 A (REMOTE SOURCE LIGHTING INT INC) 11 September 1998 (1998-09-11) page 2, line 12 - line 20 page 3, line 23 - line 33 page 10, line 18 - line 28 page 14, line 15 - line 19 page 38, line 15 - page 39, line 17 figures 10-12	1
Y		3,5,6
A		4
Y	WO 99 32825 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS SVENSKA AB (SE)) 1 July 1999 (1999-07-01) page 3, line 6 - line 10 page 4, line 3 - line 5 figures 1,2	3
A		1
	--- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

28 April 2003

Date of mailing of the international search report

08/05/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Prévoit, E

Copied from 10758383 on 03/09/2005

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 9839675	A	11-09-1998	AU	6182598 A	22-09-1998
			WO	9839675 A1	11-09-1998
WO 9932825	A	01-07-1999	CN	1252861 T	10-05-2000
			DE	29824809 U1	10-10-2002
			EP	0961900 A1	08-12-1999
			WO	9932825 A1	01-07-1999
			JP	2000515311 T	14-11-2000
			US	6300717 B1	09-10-2001
EP 1055868	A	29-11-2000	DE	29909033 U1	22-07-1999
			EP	1055868 A2	29-11-2000
US 5466981	A	14-11-1995	CA	2057719 A1	20-06-1992
			CN	1064565 A , B	16-09-1992
			DE	69108203 D1	20-04-1995
			DE	69108203 T2	26-10-1995
			EP	0491432 A2	24-06-1992
			ES	2072535 T3	16-07-1995
			JP	2986992 B2	06-12-1999
			JP	4277464 A	02-10-1992
			KR	127100 Y1	15-10-1998
WO 0239012	A	16-05-2002	WO	0239012 A2	16-05-2002

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 055 868 A (HELLA KG HUECK & CO) 29 November 2000 (2000-11-29) abstract column 2, line 55 -column 3, line 3 figure 3	5,6
A	-----	1,2
A	US 5 466 981 A (WILL JERALD D ET AL) 14 November 1995 (1995-11-14) column 3, line 41 - line 43 column 4, line 5 - line 11 figures 1,2	1,2
P,A	----- WO 02 39012 A (GEN ELECTRIC) 16 May 2002 (2002-05-16) abstract figures 10-12 page 10, line 188 -page 11, line 209 -----	1-4

Copied from 10758383 on 03/09/2005

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**